

Order Form SwingRiser Inner Post Replacement

Standard height (80 inch) inner round post

A separate order form is requivariances, indicate total quantit	• •	ordered. If you have multiple identical operators, with NO
Date:	Post or Operator SN:	
Purchase order #:	Contact ph	Contact phone:
Contact email:		<u></u>
completed and signed before IMPORTANT: Gate speed, d	re the order will be processed rection of swing, and degree o	ered sections below. The Order Form must be fully l. of swing are fixed and cannot be changed in the THE SECURE SIDE OF THE GATE LOOKING OUT toward
 ROLI stands for Right Out Left RILO stands for Right In Left O 	In. If this post is placed on the Rig	O. These come in either 90 degree or 100 degree swing. ght it will Swing Out and if placed on the Left will Swing In. ght it will Swing In and if placed on the Left will Swing Out.
 Degree of Swing: 90° swing (standard) Gate Handing for the Swin Left hand, swing out Left hand, swing in 	gRiser (HRG 220):	
Left Hand,		Right Hand.

PUBLIC

SIDE

SECURE SIDE

RILO

ROLI

Swing Out

Left Hand,

Swing In

Left Hand Post

PUBLIC

SIDE

SECURE SIDE

Right Hand,

Right Hand,

Swing In

Right Hand Post

Swing Out

Part Numbers:

Inner Post Only Inner Post w/Hydraulics

MX000941 RILO 90 MX001361 RILO 90 MX000942 ROLI 90 MX001389 ROLI 90 MX000943 RILO 100 MX002819 RILO 100 MX000944 ROLI 100 MX002820 ROLI 100

Hoses:

Hoses are ordered on a separate order form. In most installations, the hose order is placed after the operator is installed to ensure that hose lengths are accurate.

Double check that <u>one</u> box within each of the numbered sections above has been checked. The Order Form must be fully completed and signed before the order will be processed.

It is the responsibility of the customer to verify that the information on this order form is accurate. *All custom orders are non-returnable.**

Ship To Company: DF Supply, Inc.

Address: 8500 Hadden Rd.


City, State, Zip: Twinsburg, OH 44087


SwingRiser™ Reference Information

Note: All Lateral Forces Must Be Supported By Backing Post / Pilaster.

Standard Operator Configuration / Dimensions


Right Hand Post Shown - Left Hand Post Is Mirror Image

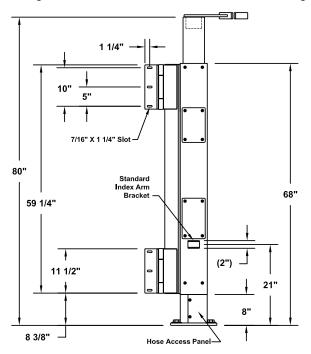



Baseplate / Footprint Dimensions

Top Cap Options

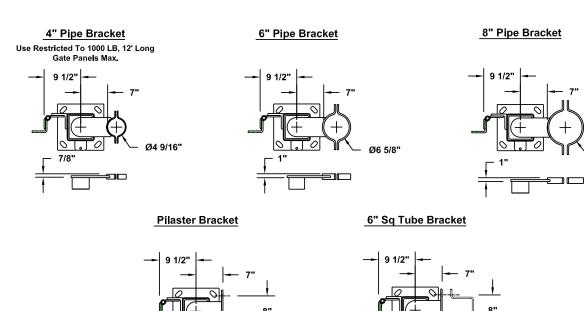

3/4" BOLT HOLES

