

Features:



Easy operation:

Light weight vehicle arrestor system reduces overall weight for easier operation and long service life.



Durable:

Steel frame cantilever gate panel with bottom track hardware for durability and smooth operation.



Compatibility:

Unified mounting template locates and aligns gate rollers, support posts, and arrestor catch bollards for easy installation.



Crash Rated^{††}:

Industry's longest tested certified M30 crash gate with a P1* rating, tested with a 24 ft clear opening.



Precise:

Raised platform predrilled for SlideDriver™ installation.




Industry leading warranty:

Both StrongSlide and SlideDriver are protected by industry leading 5 year warranty.**

StrongSlide M30

High Security Anti-Ram

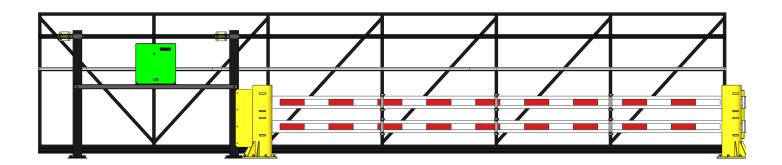

Designed with StrongArm™ and SlideDriver™ DNA

The StrongSlide M30 uses similar materials and design for the vehicle arrestor as the proven StrongArm M30.

As the premium slide gate operator in the industry, StrongSlide is operated exclusively by SlideDriver to provide reliability commensurate with the needs of an HVM slide gate.

Additional Features

Bottom track cantilever gate

Superior gate mechanics, easier to install, and designed for a service life of 500,000 cycles.**

StrongArm vehicle arrestor technology

Light weight arrestor keeps the overall weight of gate down, reducing wear and improving reliability and service life.

Pre-aligned installation template

Error-proofs and simplifies installation for lower overall cost.

Side-mounted top track

Vertical stabilizer system uses roller element guides in side-mounted track to provide safety, improve performance in windy conditions, and assures alignment at close limit.

Bolt down design

All attachment points are cast in concrete, and both the gate and arrestor structures are bolted down. This simplifies the installation and assures proper alignment.

Concrete filled catch bollards

These posts capture the arrestor beams during an impact and double as bollards to protect the gate, operator, and fence.

Versatile infill options

A wide array of infill options for any architectural or design need. Constructed from powder coated steel for years of carefree service.

Designed with SlideDriver in mind

Industry leading SlideDriver gate operator bots down to an elevated custom built platform, making it perfectly positioned to power the gate. SlideDriver 50VF2/3 will close the gate in only about 8 seconds in emergencies.

^{**} Preventive maintenance followed per instructions.



^{*} Ratings: ASTM F2656-20 M30-P1 †† Contact HySecurity to receive a copy of the ASTM F2656-20 M30-P1 Test Certification.